


Standard Telecentric Lens

Model		APT4-65C			
Optical Mag.		× 4.0 ± 5 %			
FOV (V x H)	2/3"	1.8	×	2.1	mm
	1/2"	1.2	×	1.6	mm
	1/3"	0.9	×	1.2	mm
WD		64.5 mm ± 2			
O/I (Object & Imager Distance)		150.4 mm			
Working F/#		28.9			
NA		0.069			
DOF at PCoC $\phi$ 0.04mm		0.1 mm			
TV Distortion (2/3")		0.01 %			
Wavelength		Visible			
Mount		C-Mount			
Flange Back		17.526 mm			
Sensor Size (max.)		2/3"			
Co-Axial Prism		Built-in			
Weight (approx.)		39 g			
Dimension		$\phi$ 29 (max.) × L = 68.4 mm			

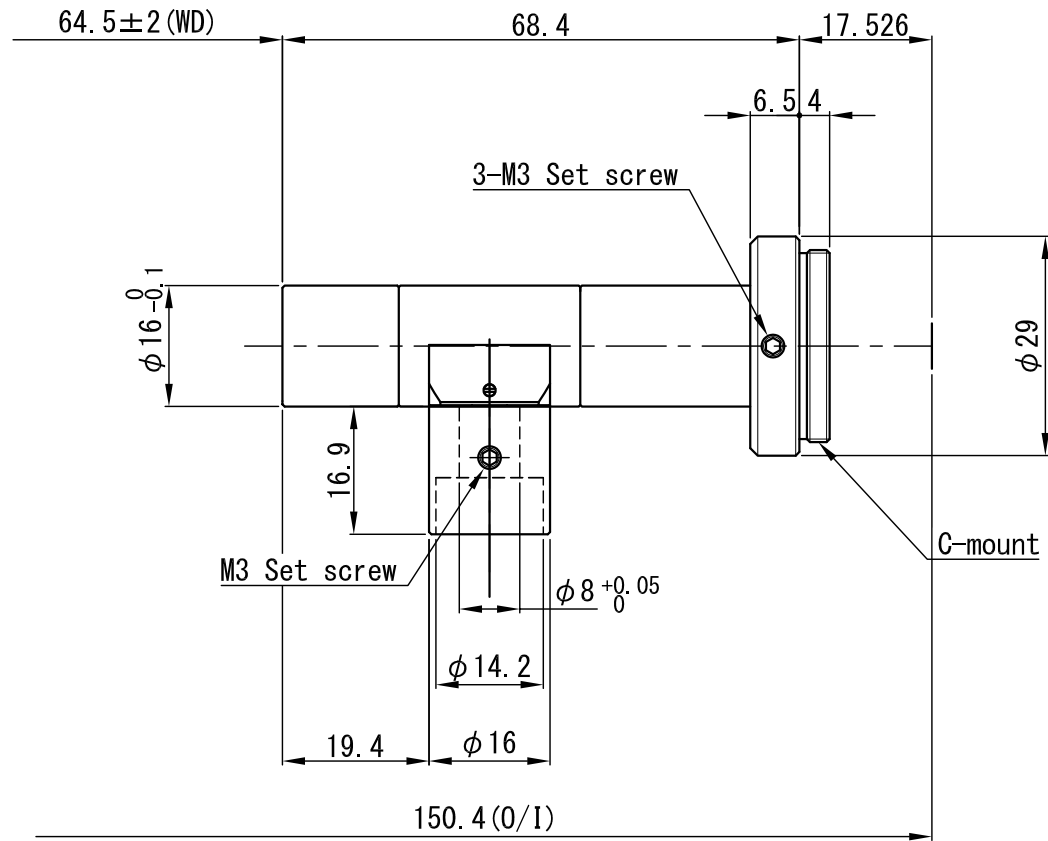

△				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 個数	
△				T. A.	T. A.	TREATMENT 処理	-	FINISHING 仕上	-	-	
△						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-		
△				DESIGNED	DRAWN	OVER 250 UP TO 1000	±0.3 ±0.5 ±1.0 ±0.2	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)	
△				T. A.	M. Y.	OVER 63 UP TO 250	±0.2 ±0.3 ±0.6 ±0.15	UNIT (mm)	-	APT 4 - 6 5 C	
△						OVER 16 UP TO 63	±0.1 ±0.2 ±0.4 ±0.1	SCALE	1 / 1		NAME
	DATE	EXCH NO.	REVISION 変更記事			TOLERANCES	(A) B C S	DATE	'14.03.27	DRAW NO.	01DTC0545A1