


4/3" Distortionless Macro Lens

Model		VS-LLD35		
Focal Length(f)		35 mm		
Maximum Aperture Ratio		1: 2.0		
Optical Mag. Range		(∞) \times 0.05 \sim \times 0.3		
Optical Mag.		\times 0.05	\times 0.15	\times 0.3
FOV (V x H)	4/3"	272.0 \times 362.0 mm	90.7 \times 120.7 mm	45.3 \times 60.3 mm
	1"	225.2 \times 225.2 mm	75.1 \times 75.1 mm	37.5 \times 37.5 mm
	2/3"	142.0 \times 168.0 mm	47.3 \times 56.0 mm	23.7 \times 28.0 mm
WD		706.6 mm	239.2 mm	129.5 mm
O/I (Object & Imager Distance)		806.6 mm	339.2 mm	229.5 mm
Working F/# *Value at Iris Open		2.2	2.5	3.0
TV Distortion (4/3")		-0.15 %	-0.14 %	-0.10 %
Operation		Manual (Lock Screw M2)		
Wavelength		Visible		
Mount		C-Mount		
Flange Back		17.526 mm		
Sensor Size (max.)		4/3"		
Filter Thread		M 46 P= 0.75		
Weight (approx.)		295 g		
Dimension		ϕ 50.5 (max.) \times L = 82.5 mm		

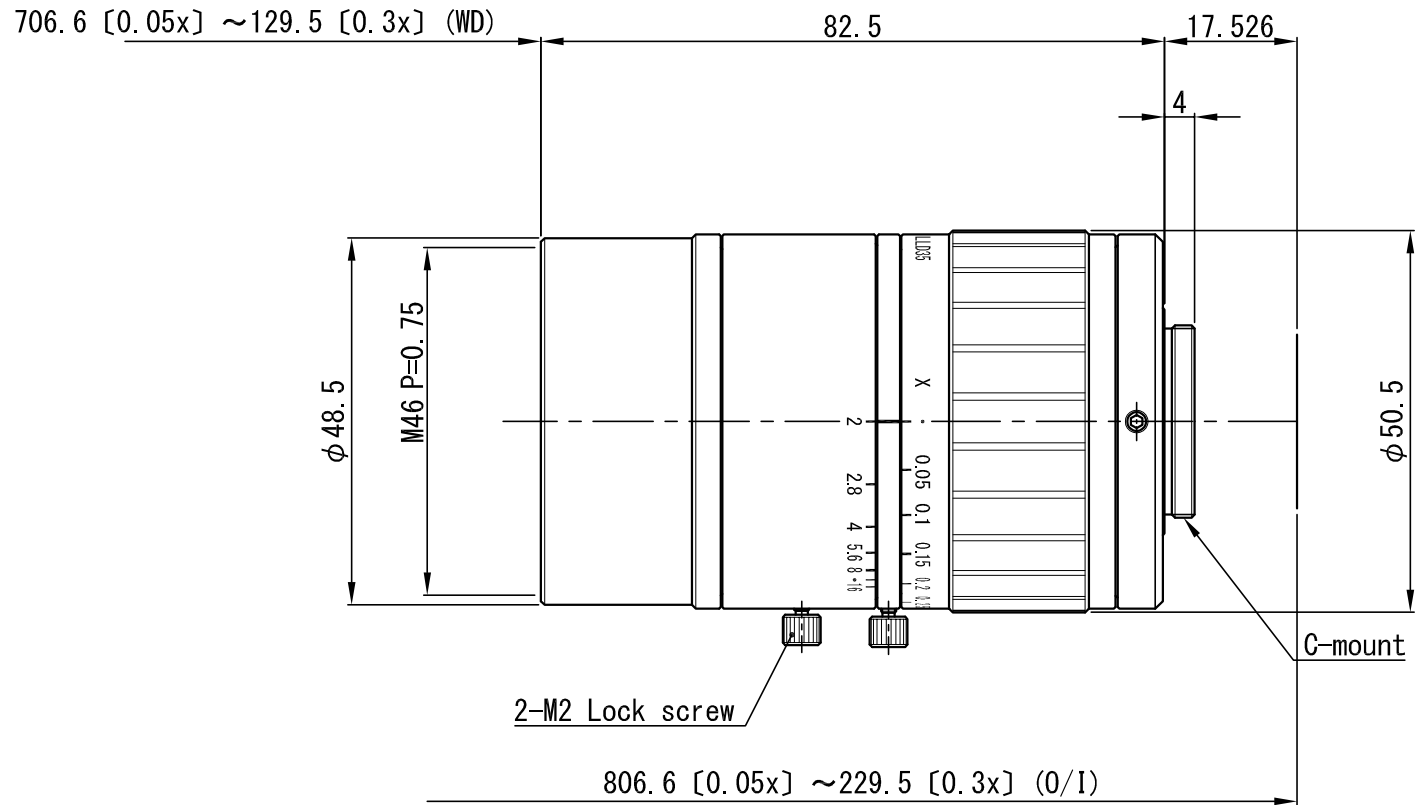

△				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 個数	
△				T. A.	T. A.	TREATMENT 処理	-	FINISHING 仕上	-	-	
△						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-		
△				DESIGNED	DRAWN	OVER 250 UP TO 1000	±0.3 ±0.5 ±1.0 ±0.2	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)	
△				T. A.	T. T.	OVER 63 UP TO 250	±0.2 ±0.3 ±0.6 ±0.15	UNIT (mm)	-	VS-LLD35	
△						OVER 16 UP TO 63	±0.1 ±0.2 ±0.4 ±0.1				SCALE
	DATE	EXCH NO.	REVISION 変更記事			TOLERANCES	A B C S	DATE	14.06.09	DRAW NO.	01DLD0028A1