


1" Vibration Resistant Lenses

Model	VS-MC50H1
Focal Length (f)	50 mm (49.93)
Maximum Aperture Ratio	1: 1.8
Angle of View (1")	12.8° × 12.8° (Diagonal: 18.1°)
M.O.D	500 mm
TV Distortion (1")	-0.01 %
Operation	Manual
Wavelength	Visible
Mount	C-Mount
Flange Back	17.526 mm
Sensor Size (max.)	1"
Filter Thread	M 40.5 P= 0.5
Weight (approx.)	94 g
Dimension	ϕ 44 (max.) × L = 44.5 mm

※ Note: Available with MC Focus Locking System, FNO (Iris Open) 5 .6 & 8

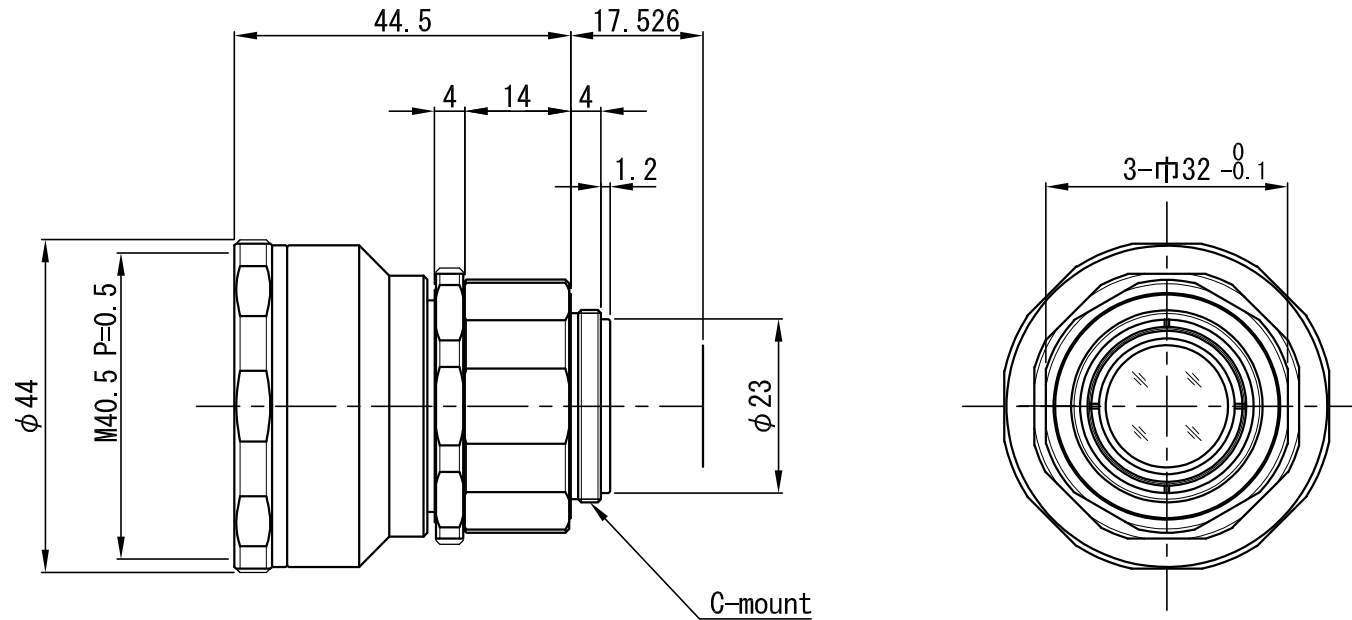

$\triangle \times$				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 个数			
$\triangle \times$				T. A.	T. A.	TREATMENT 処理	-	FINISHING 仕上	-	X			
$\triangle \times$						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-				
$\triangle \times$				DESIGNED	DRAWN	OVER 250 UP TO 1000 ± 0.3 ± 0.5 ± 1.0 ± 0.2	UNIT (mm)	ANGLE 角度	METHOD 図法		REMARK 適用 (機種名)		
$\triangle \times$				T. A.	H. M.	OVER 63 UP TO 250 ± 0.2 ± 0.3 ± 0.6 ± 0.15		SCALE	-		VS-MC50H1		
$\triangle \times$	型式表記訂正	18.08.22	H. M.			OVER 16 UP TO 63 ± 0.1 ± 0.2 ± 0.4 ± 0.1	1 / 1					NAME	外観図
$\triangle \times$						OVER 0 UP TO 16 ± 0.05 ± 0.1 ± 0.2 ± 0.1							
NO. x 箇所	REVISION 訂正事項	DATE	NAME	TOLERANCES	A	B	C	S	DATE	18.07.31	DRAW NO.	01D MC 0404A 2	