


Standard Telecentric Lens

Model		VS-TC1-150			
Optical Mag.		× 1.0 ± 5 %			
FOV (V x H)	2/3"	-			
	1/2"	4.8	×	6.4	mm
	1/3"	3.6	×	4.8	mm
WD		156.2 mm ± 5			
O/I (Object & Imager Distance)		306.2 mm			
Working F/#		13.0			
NA		0.038			
DOF at PCoC ϕ 0.04mm		1.0 mm			
TV Distortion (1/2")		0.01 %			
Relative Illuminance (Y=4)		99 %			
Wavelength		Visible			
Mount		C-Mount			
Flange Back		17.526 mm			
Sensor Size (max.)		1/2"			
Co-Axial Prism		-			
Filter Thread		M 22.5 P= 0.5			
Weight (approx.)		78 g			
Dimension		ϕ 30 (max.)	×	L =	132.5 mm

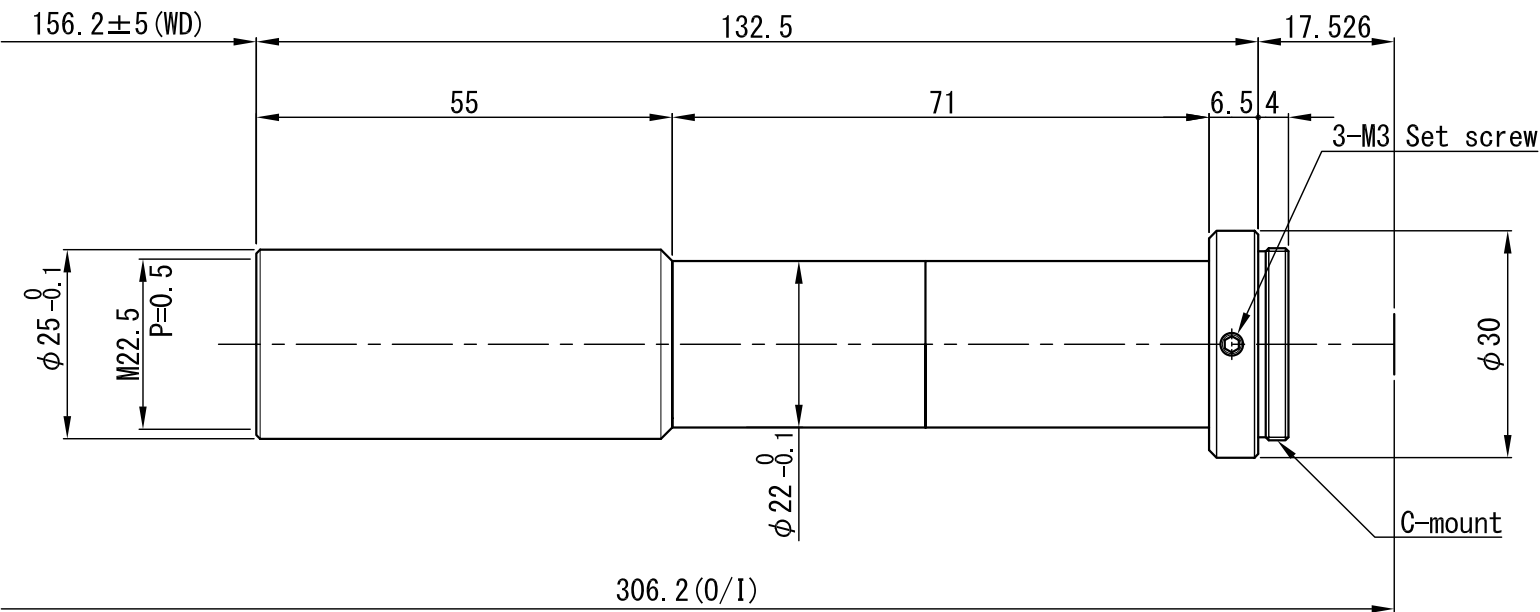

△				APPROVED	CHECKED	MATERIAL 材料				—		CHAMFER 一般面取		—		QUANTITY 個数		
△				T. A.	T. A.	TREATMENT 処理				—		FINISHING 仕上		—		—		
△						TREATMENT CONTACT 処理接点				—		DECENTRATION 偏芯		—				
△				DESIGNED	DRAWN	OVER 250 UP TO 1000	±0.3	±0.5	±1.0	±0.2	UNIT (mm)	ANGLE 角度	METHOD 図法	REMARK 適用（機種名）				
△						OVER 63 UP TO 250	±0.2	±0.3	±0.6	±0.15		—		V S - T C 1 - 1 5 0				
△						T. A.	M. Y.	OVER 16 UP TO 63	±0.1	±0.2	±0.4	±0.1	SCALE	1 / 1		NAME	外 観 図	
△								OVER 0 UP TO 16	±0.05	±0.1	±0.2	±0.1		DATE		' 11. 05. 10	DRAW NO.	0 D T C 0 4 4 5 A 1
	DATE	EXCH NO.	REVISION 変更記事			TOLERANCES				Ⓐ	B	C	S					