


Standard Telecentric Lens

Model		VS-TC5-65			
Optical Mag.		×	5.0	± 5 %	
FOV (V x H)	2/3"	1.4	×	1.7 mm	
	1/2"	1.0	×	1.3 mm	
	1/3"	0.7	×	1.0 mm	
WD		64.5 mm ± 2			
O/I (Object & Imager Distance)		155.3 mm			
Working F/#		36.2			
NA		0.069			
DOF at PCoC ϕ 0.04mm		0.1 mm			
TV Distortion (2/3")		0.00 %			
Relative Illuminance (Y=5.5)		100 %			
Wavelength		Visible			
Mount		C-Mount			
Flange Back		17.526 mm			
Sensor Size (max.)		2/3"			
Co-Axial Prism		-			
Weight (approx.)		41 g			
Dimension		ϕ 31 (max.)	×	L = 73.3 mm	

品番	品名	材料	個数	記事
----	----	----	----	----

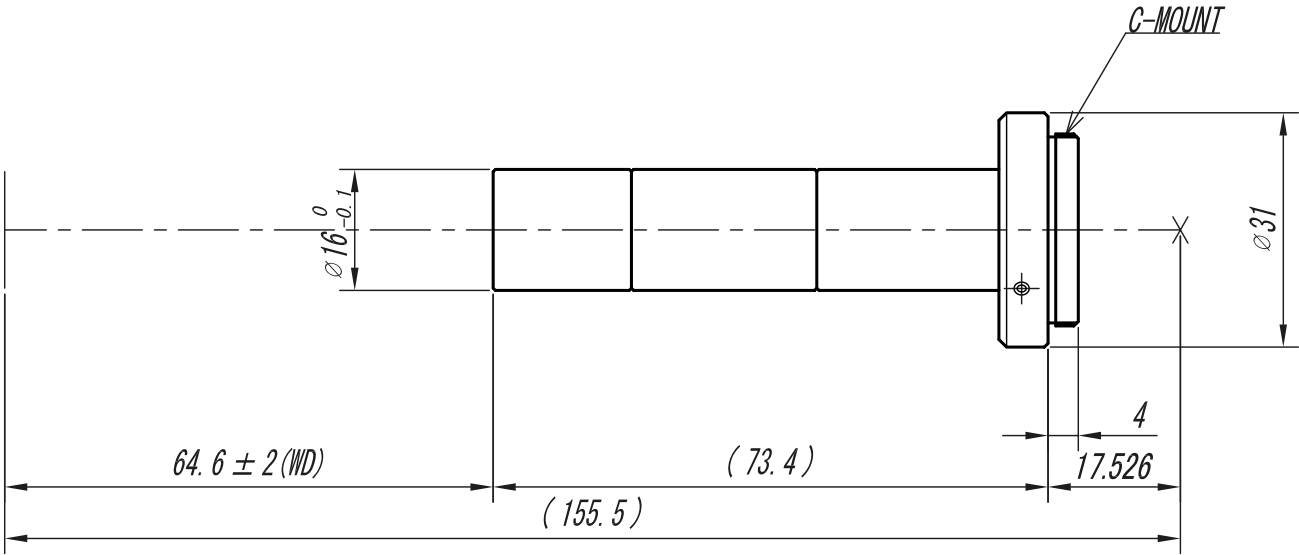

	APPROVED	CHECKED	MATERIAL 材料			FINISH/ROUGHNESS 仕上程度				HEAT TREATMENT 熱処理			SURFACE TREATMENT 表面処理		QUANTITY 個数
	J. A.	T. A.													
			OVER 250 UP TO 1000	±0.3	±0.5	±1.0	±0.2	UNIT (mm)	ANGLE 角度	METHOD 図法	REMARK 適用（機種名）				
	DESIGNED	DRAWN	OVER 63 UP TO 250	±0.2	±0.3	±0.6	±0.15				VS - TC 5 - 6 5				
	T. T.	T. M.	OVER 16 UP TO 63	±0.1	±0.2	±0.4	±0.1	SCALE	1 / 1		NAME	外 観 図			
			OVER 0 UP TO 16	±0.05	±0.1	±0.2	±0.1								
REVISION 変更記事					TORERANCES	A	B	C	S	DATE	' 03. 08. 14		DRAW NO.	ODTC0020A1	