


Telecentric Lens

Model		VS-TEC04/S		
Optical Mag.		× 0.4		
FOV (V x H)	2/3"	17.8	×	21.0 mm
	1/2"	12.0	×	16.0 mm
	1/3"	9.0	×	12.0 mm
WD		147.8 mm ± 4		
O/I (Object & Imager Distance)		289.3 mm		
Working F/# *Value at Iris Open		5.0		
NA		0.040		
DOF at PCoC ϕ 0.04mm		2.5 mm		
TV Distortion (2/3")		-0.03 %		
Relative Illuminance (Y=5.5)		98 %		
Wavelength		Visible		
Mount		C-Mount		
Flange Back		17.526 mm		
Sensor Size (max.)		2/3"		
Filter Thread		M 43 P= 0.75		
Weight (approx.)		255 g		
Dimension		ϕ 45 (max.) × L = 124 mm		

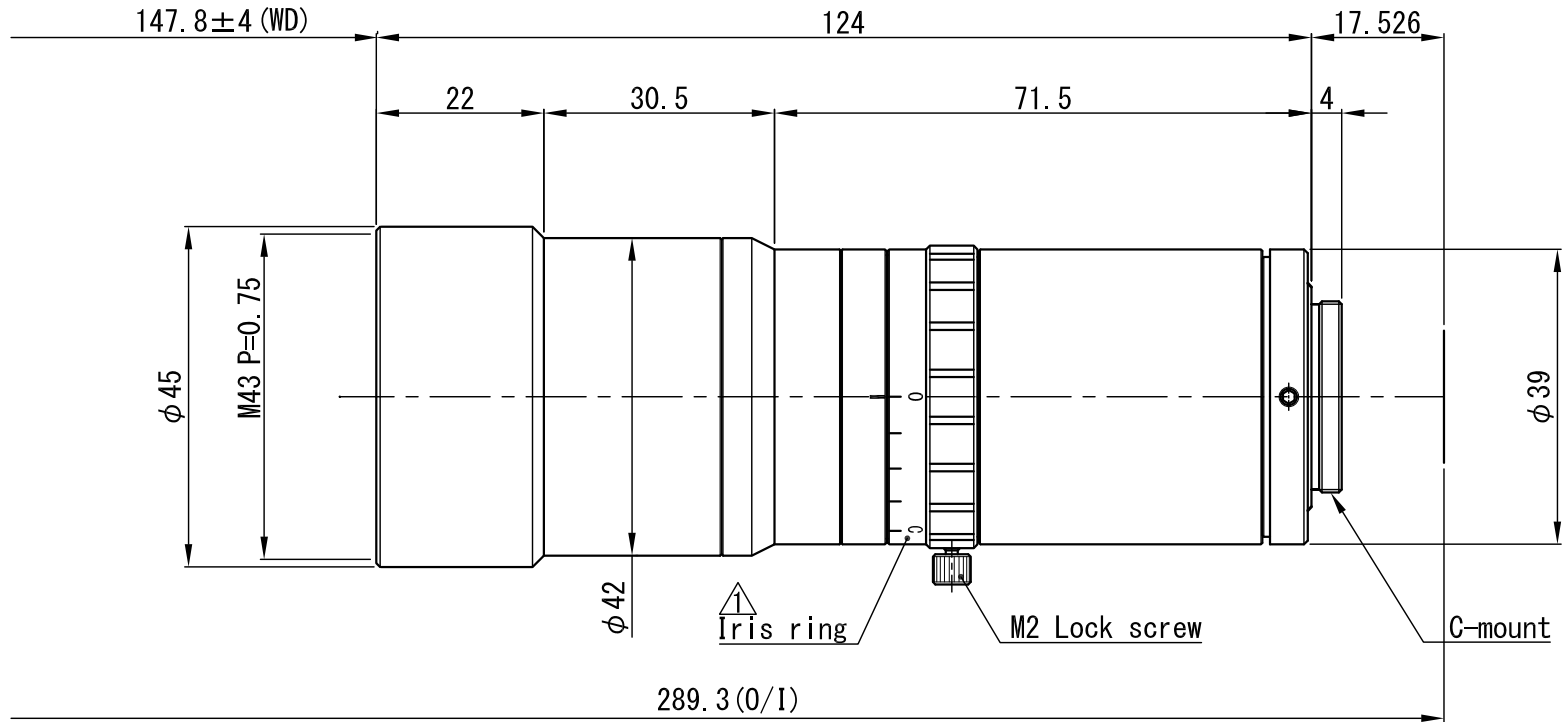

△×				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 個数		
△×				T. A.	T. A.	TREATMENT 処理	-	FINISHING 仕上	-	-		
△×						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-			
△×				DESIGNED	DRAWN	OVER 250 UP TO 1000 ±0.3 ±0.5 ±1.0 ±0.2	UNIT (mm)	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)		
△×				T. A.	M. Y.	OVER 63 UP TO 250 ±0.2 ±0.3 ±0.6 ±0.15		-	TEC04/S			
△× 1	Iris ring表記追加	19.03.03	T. F.			OVER 16 UP TO 63 ±0.1 ±0.2 ±0.4 ±0.1		SCALE		1 / 1	NAME	DRAWING / 外觀図
NO.×箇所	REVISION 訂正事項	DATE	NAME			OVER 0 UP TO 16 ±0.05 ±0.1 ±0.2 ±0.1		DATE		11.05.09	DRAW NO.	01D1MC0260A2
						TOLERANCES	A B C S					