


Fixed Focal Length Lens

Model	VS-1618H/3CMOS
Focal Length (f)	16 mm (16.10)
Maximum Aperture Ratio	1: 1.8
Aperture	F 1.8 ~ Close
Angle of View (1/1.8")	19.1° × 25.1° (Diagonal: 31.6°)
M.O.D	150 mm
TV Distortion (1/1.8")	-0.44 %
Operation	Manual (Lock screw M2)
Wavelength	Visible
Mount	C-Mount
Flange Back	17.526 mm
Sensor Size (max.)	1/1.8"
Filter Thread	M 30.5 P= 0.5
Weight (approx.)	114 g
Dimension	ϕ 36 (max.) × L = 56 mm

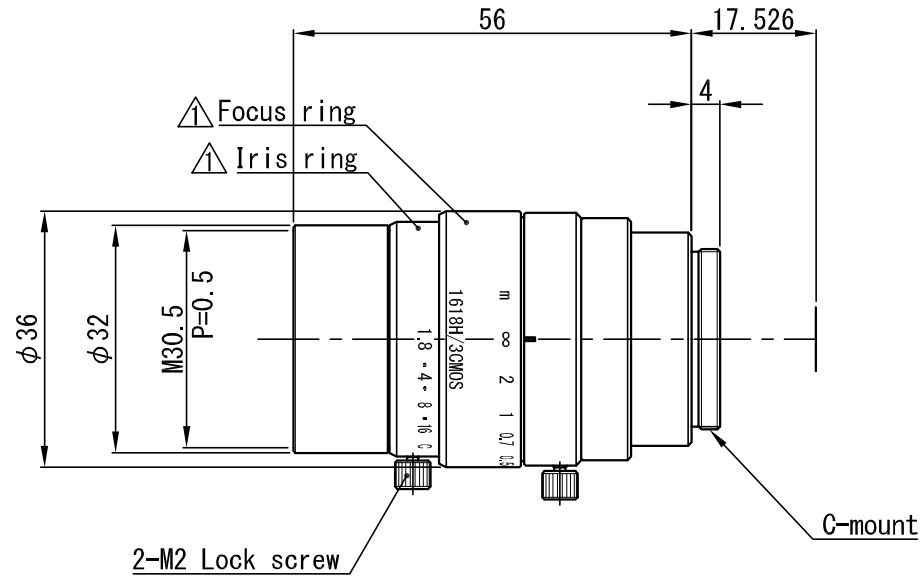

$\triangle \times$				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 個数	
$\triangle \times$				T. A.	T. A.	TREATMENT 処理	-	FINISHING 仕上	-		
$\triangle \times$						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-		
$\triangle \times$				DESIGNED	DRAWN	OVER 250 UP TO 1000	± 0.3	± 0.5	± 1.0	± 0.2	
$\triangle \times$				T. S.	T. S.	OVER 63 UP TO 250	± 0.2	± 0.3	± 0.6	± 0.15	
$\triangle \times 2$	操作リング表記追加	20.06.30	T. F.			OVER 16 UP TO 63	± 0.1	± 0.2	± 0.4	± 0.1	UNIT (mm)
NO. x 箇所	REVISION 訂正事項	DATE	NAME			OVER 0 UP TO 16	± 0.05	± 0.1	± 0.2	± 0.1	
						TOLERANCES	A	B	C	S	
						SCALE	1 / 1		NAME	VS-1618H/3CMOS	
						DATE	19.10.09		DRAW NO.	外観図 / DRAWING	
						0DSV0192A2					