
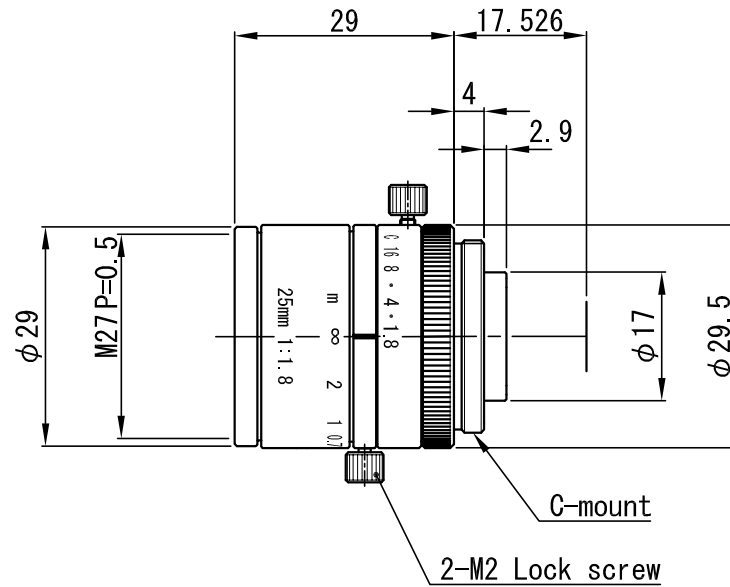


2 Mega Pixel Machine Vision CCTV Lens

Model	VS-2518VM				
Focal Length (f)	25 mm		(25.41)		
Maximum Aperture Ratio	1: 1.8		(1.84)		
Aperture	F 1.8	~	Close		
Angle of View (1/1.8″)	12.1°	×	15.9°	(Diagonal: 19.9°)	
M.O.D	250 mm				
TV Distortion (1/1.8″)	-0.15 %				
Operation of Iris & Focus	Manual (Lock screw M2)				
Wavelength	Visible				
Mount	C-Mount				
Flange Back	17.526 mm				
Sensor Size (max.)	1/1.8″				
Filter Thread	M 27	P=	0.5		
Weight (approx.)	60 g				
Dimension	φ 29.5	(max.)	×	L =	29 mm



△×				APPROVED	CHECKED	MATERIAL 材料				—		CHAMFER 一般面取		—		QUANTITY 個数	
△×				T. A.	T. A.	TREATMENT 処理				—		FINISHING 仕上		—		—	
△×						TREATMENT CONTACT 処理接点				—		DECENTRATION 偏芯		—			
△×						OVER 250 UP TO 1000 ±0.3 ±0.5 ±1.0 ±0.2				UNIT (mm)	ANGLE 角度	METHOD 図法	REMARK 適用（機種名）				
△×				DESIGNED	DRAWN	OVER 63 UP TO 250 ±0.2 ±0.3 ±0.6 ±0.15					—		V S - 2 5 1 8 V M				
△×				T. A.	M. M.	OVER 16 UP TO 63 ±0.1 ±0.2 ±0.4 ±0.1					SCALE	1 / 1		NAME	外 観 図		
						OVER 0 UP TO 16 ±0.05 ±0.1 ±0.2 ±0.1				DATE		' 16. 03. 03		DRAW NO.	0 D S V 0 1 4 7 A 1		
NO.×箇所	REVISION 訂正事項	DATE	NAME			TOLERANCES A B C S											