


8K FFL for Super 35mm sensor

Model	VS-HX3535
Focal Length (f)	35 mm (36.06)
Maximum Aperture Ratio	1: 3.5
Aperture	F 3.5 ~ F 16
Angle of View (Super 35mm)	27.6° × 41.1° (Diagonal: 49.9°)
M.O.D	330.4 mm
TV Distortion (Super 35mm)	-1.48 %
Operation	Manual (Lock screw M2)
Wavelength	Visible
Mount	M 52 P= 0.75
Flange Back	46.5 mm
Sensor Size (max.)	Super 35mm
Filter Thread	M 49 P= 0.75
Weight (approx.)	500 g
Dimension	ϕ 56 (max.) × L = 107.1 mm

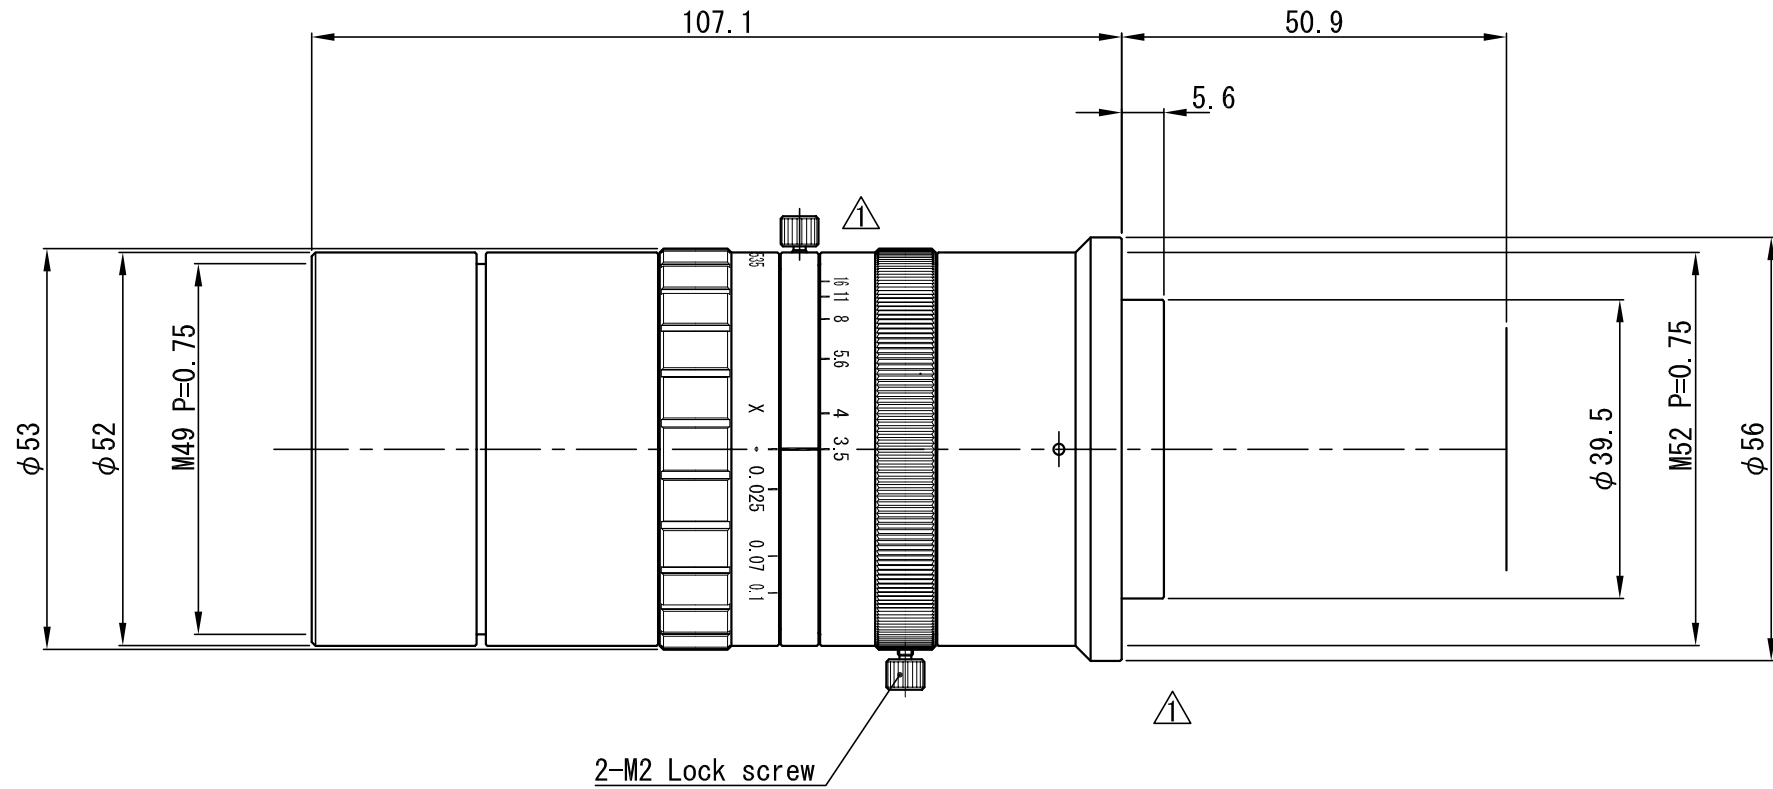

$\triangle \times$				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 個数				
$\triangle \times$				T. A.	T. A.	TREATMENT 処理	-	FINISHING 仕上	-					
$\triangle \times$						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-					
$\triangle \times$				DESIGNED	DRAWN	OVER 250 UP TO 1000	± 0.3	± 0.5	± 1.0	± 0.2				
$\triangle \times$				T. S.	T. S.	OVER 63 UP TO 250	± 0.2	± 0.3	± 0.6	± 0.15				
$\triangle \times 2$	絞り彫刻変更、Fマウント除去	20.06.17	T. S.			OVER 16 UP TO 63	± 0.1	± 0.2	± 0.4	± 0.1	UNIT (mm)			
NO. x 箇所	REVISION 訂正事項	DATE	NAME			OVER 0 UP TO 16	± 0.05	± 0.1	± 0.2	± 0.1	SCALE			
						TOLERANCES	A	B	C	S	DATE	19.11.07	DRAW NO.	01D S V 0 1 8 9 A 2
									ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)	VS-HX3535		
									ϕ 図法	外観図				