


Line Scan Macro Lens

Model	VS-L5018FL/F			
Focal Length (f)	50 mm			
Optical Mag. Range	$(\infty) \times 0.05 \sim \times 0.14$			
Optical Mag.	$\times 0.05$	$\times 0.07$	$\times 0.1$	$\times 0.14$
WD	1123.7 mm	752.4 mm	533.6 mm	388.6 mm
O/I (Object & Imager Distance)	1223.7 mm	852.4 mm	633.6 mm	488.6 mm
Aperture	F 1.8 $\sim$ 16			
Working F/# *Value at Iris Open	2.0	2.0	2.1	2.2
DOF at PCoC $\phi$ 0.04mm	64.0 mm	32.7 mm	16.8 mm	9.0 mm
Optical Distortion (Y=21.5)	-2.37 %			
Operation	Manual (Lock Screw M2)			
Wavelength	Visible			
Mount	F-Mount			
Flange Back	46.5 mm			
Image Circle	$\phi$ 45 mm			
Filter Thread	M 62 P= 0.75			
Weight (approx.)	340 g			
Dimension	$\phi$ 65 (max.) $\times$ L = 53.5 mm			

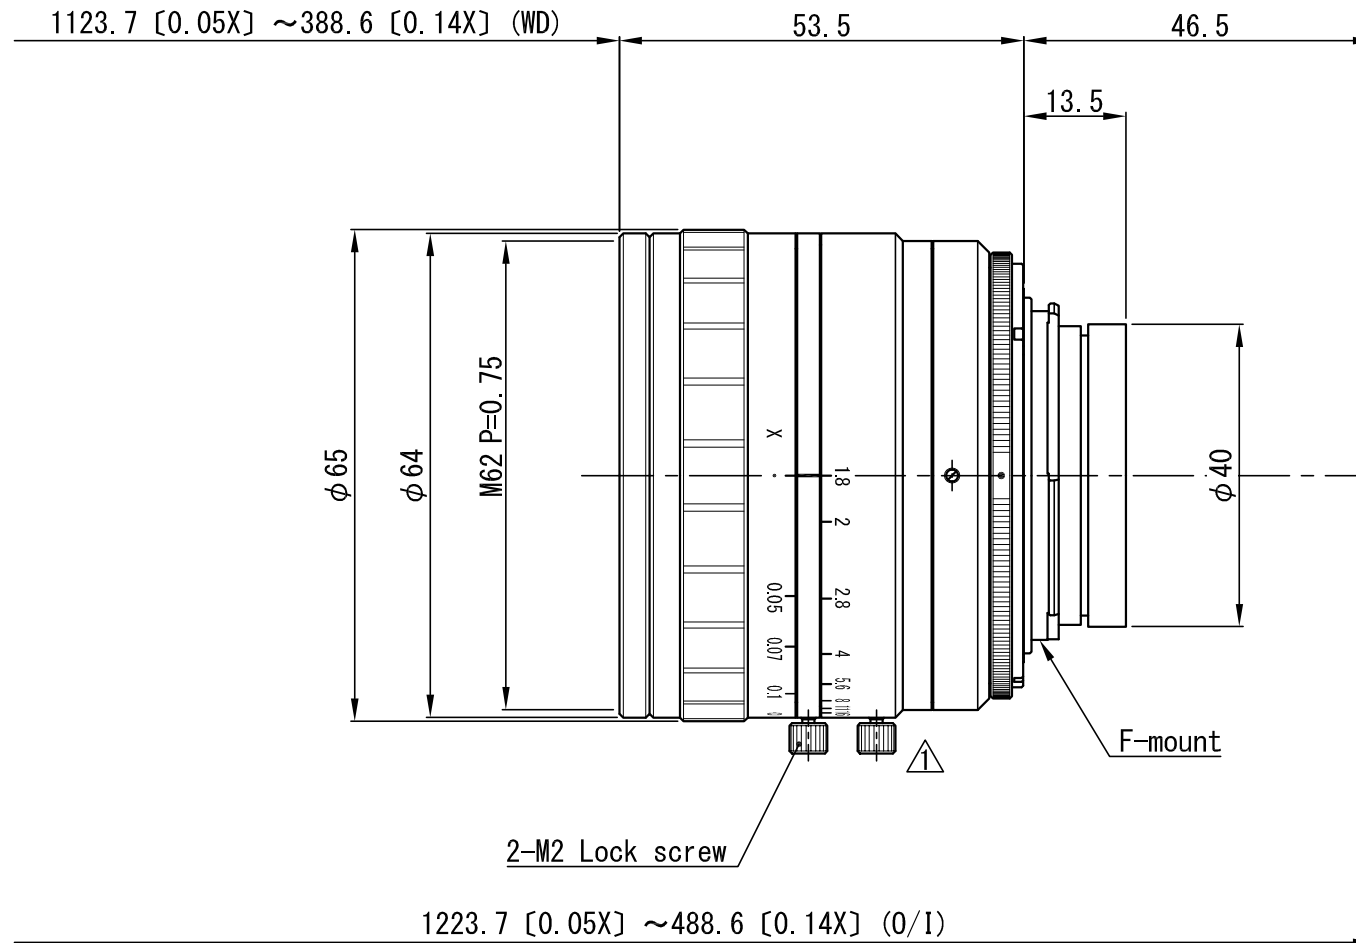

△×				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 個数		
△×				T. A.	T. T.	TREATMENT 処理	-	FINISHING 仕上	-	-		
△×						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-			
△×				DESIGNED	DRAWN	OVER 250 UP TO 1000	±0.3 ±0.5 ±1.0 ±0.2	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)		
△×				T. A.	M. Y.	OVER 63 UP TO 250	±0.2 ±0.3 ±0.6 ±0.15	UNIT (mm)	-	VS-L5018FL/F		
△× 1	ロケット追加	15.12.01	T. T.			OVER 16 UP TO 63	±0.1 ±0.2 ±0.4 ±0.1	SCALE	1 / 1		NAME	外觀図
NO. × 箇所	REVISION 訂正事項	DATE	NAME			OVER 0 UP TO 16	±0.05 ±0.1 ±0.2 ±0.1	DATE	13.05.30		DRAW NO.	01D1M1C0336A1
						TOLERANCES	A B C S					