


Line Scan Telecentric Lens

Model	VS-LTC1-130-45/FS
Optical Mag.	× 1.0 ± 5 %
FOV	φ 45.0 mm
WD	130.0 mm ± 4
O/I (Object & Imager Distance)	411.5 mm
Working F/# *Value at Iris Open	6.4
NA	0.078
DOF at PCoC φ 0.04mm	0.5 mm
Optical Distortion (Y=22.5)	0.04 %
Relative Illuminance (Y=22.5)	97 %
Wavelength	Visible
Mount	F-Mount
Flange Back	46.5 mm
Image Circle	φ 45 mm
Co-Axial Prism	-
Weight (approx.)	1180 g
Dimension	φ 75 (max.) × L = 235 mm

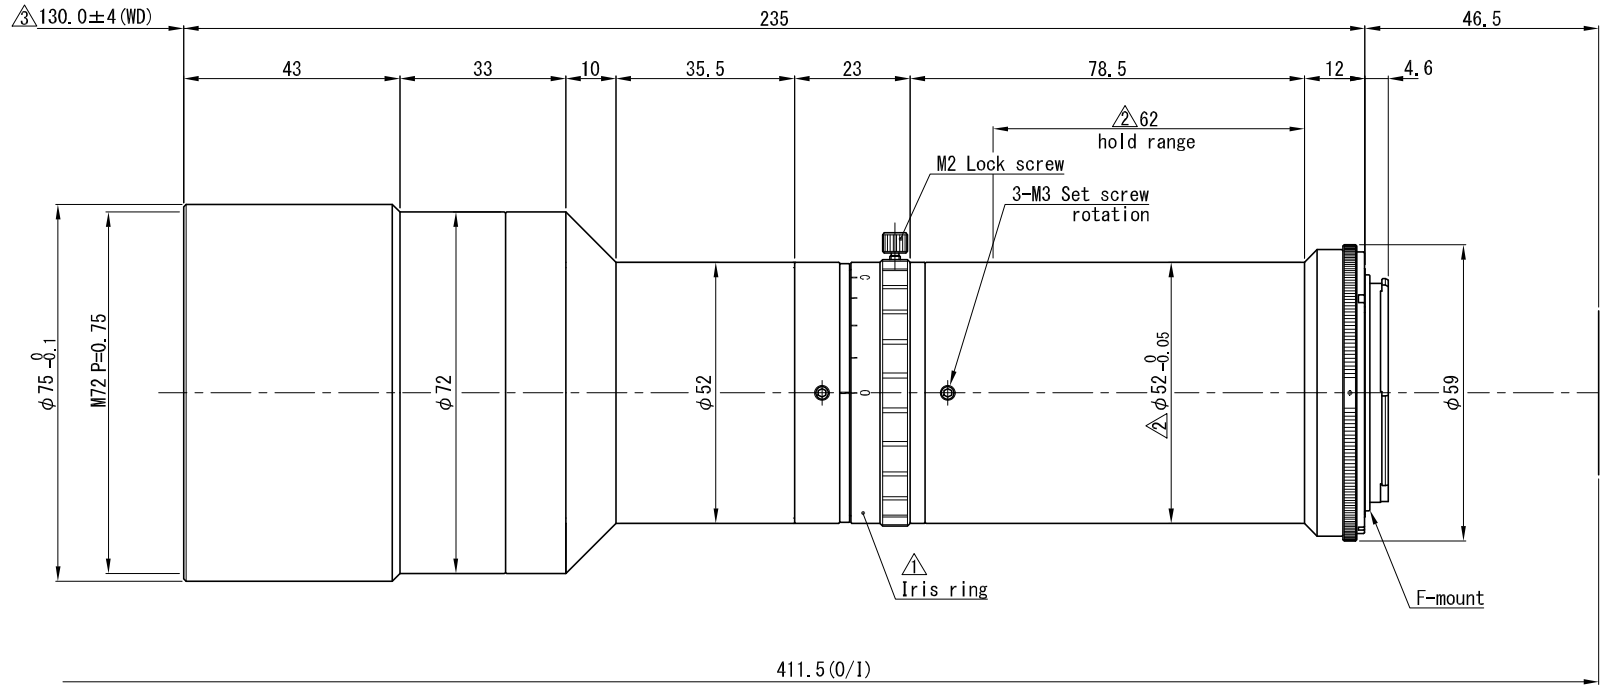

△×				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 個數
△×				T. A.	T. A.	TREATMENT 処理	-	FINISHING 仕上	-	-
△× 1	WD公差追記	20.12.09	R. K.	DESIGNED	DRAWN	TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-	-
△× 2	ホ-ル 範囲・外径公差追記	20.10.13	R. H.	T. A.	H. M.	OVER 250 UP TO 1000	±0.3 ±0.5 ±1.0 ±1.2	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)
△× 1	Iris ring表記追加	19.03.03	T. F.			OVER 63 UP TO 250	±0.2 ±0.3 ±0.6 ±0.15	UNIT (mm)	VS-LTC1-130-45/FS	
NO.×箇所	REVISION 訂正事項	DATE	NAME			OVER 16 UP TO 63	±0.2 ±0.4 ±0.1	SCALE	1 / 1	NAME
						OVER 0 UP TO 16	±0.05 ±0.1 ±0.2 ±0.1	DATE	'16.08.31	DRAW NO.
						TOLERANCES	A B C S			0:0:0:1:0:1:7:4:4