


1" Vibration Resistant Lenses

Model	VS-MC08H1
Focal Length (f)	8 mm (8.25)
Maximum Aperture Ratio	1: 1.4
Angle of View (1")	72.7° × 72.7° (Diagonal: 92.5°)
M.O.D	100 mm
TV Distortion (1")	-0.35 %
Operation	Manual
Wavelength	Visible
Mount	C-Mount
Flange Back	17.526 mm
Sensor Size (max.)	1"
Filter Thread	M 55 P= 0.75
Weight (approx.)	94 g
Dimension	ϕ 59 (max.) × L = 59 mm

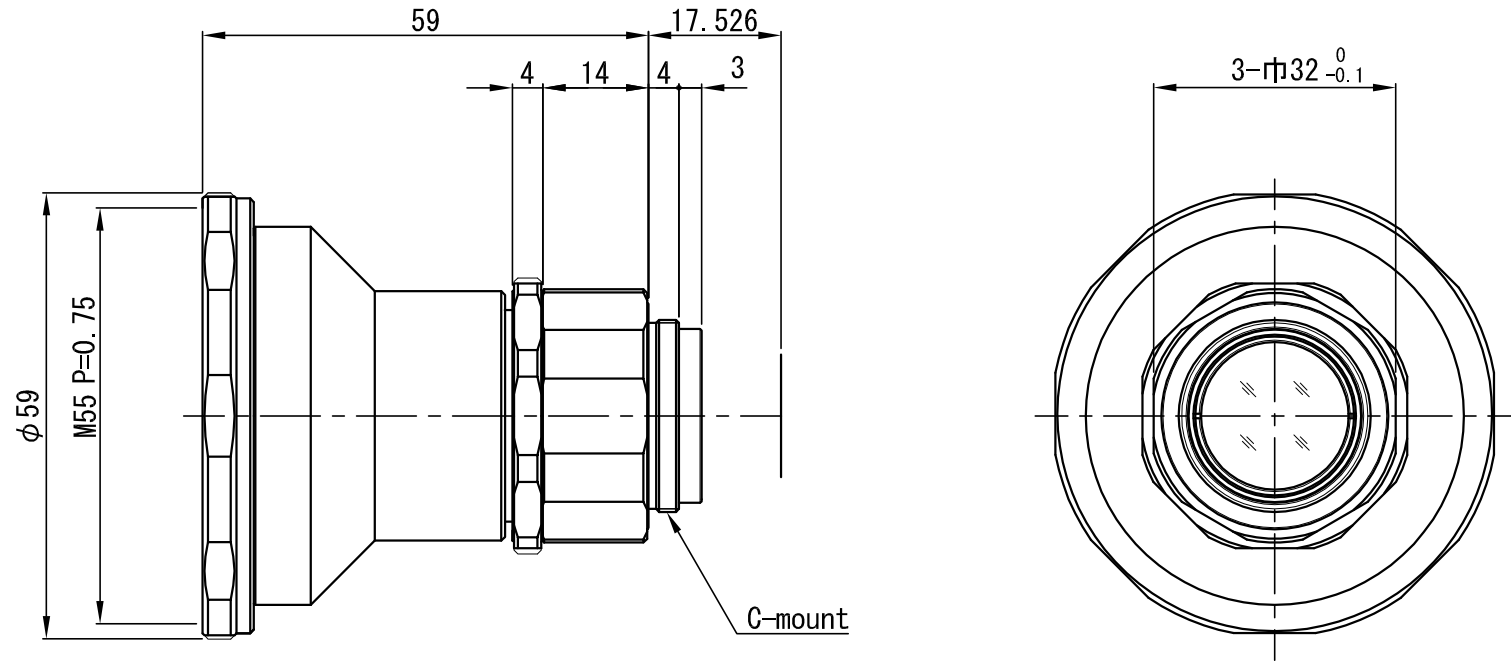

△×				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 个数				
				T. A.	T. A.	TREATMENT 処理	-	FINISHING 仕上	-	X				
						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-					
						OVER 250 UP TO 1000	±0.3	±0.5	±1.0		±0.2	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)
				DESIGNED	DRAWN	OVER 63 UP TO 250	±0.2	±0.3	±0.6	±0.15	UNIT (mm)	-		VS-MC08H1
△×1	機種表記変更	18.08.22	K. T.	K. T.	K. T.	OVER 16 UP TO 63	±0.1	±0.2	±0.4	±0.1	SCALE	1 / 1	NAME	外觀図
NO. × 箇所	REVISION 訂正事項	DATE	NAME			TOLERANCES	A	B	C	S	DATE	18.07.30	DRAW NO.	01D1MC0398A2