


Standard Telecentric Lens

Model		VS-TC8-65			
Optical Mag.		× 8.0 ± 5 %			
FOV (V x H)	2/3"	0.9	×	1.1	mm
	1/2"	0.6	×	0.8	mm
	1/3"	0.5	×	0.6	mm
WD		64.0 mm ± 2			
O/I (Object & Imager Distance)		177.0 mm			
Working F/#		57.1			
NA		0.070			
DOF at PCoC ϕ 0.04mm		0.07 mm			
TV Distortion (2/3")		0.00 %			
Relative Illuminance (Y=5.5)		100 %			
Wavelength		Visible			
Mount		C-Mount			
Flange Back		17.526 mm			
Sensor Size (max.)		2/3"			
Co-Axial Prism		-			
Weight (approx.)		48 g			
Dimension		ϕ 31 (max.) × L = 95.5 mm			

品番	品名	材料	個数	記事
----	----	----	----	----

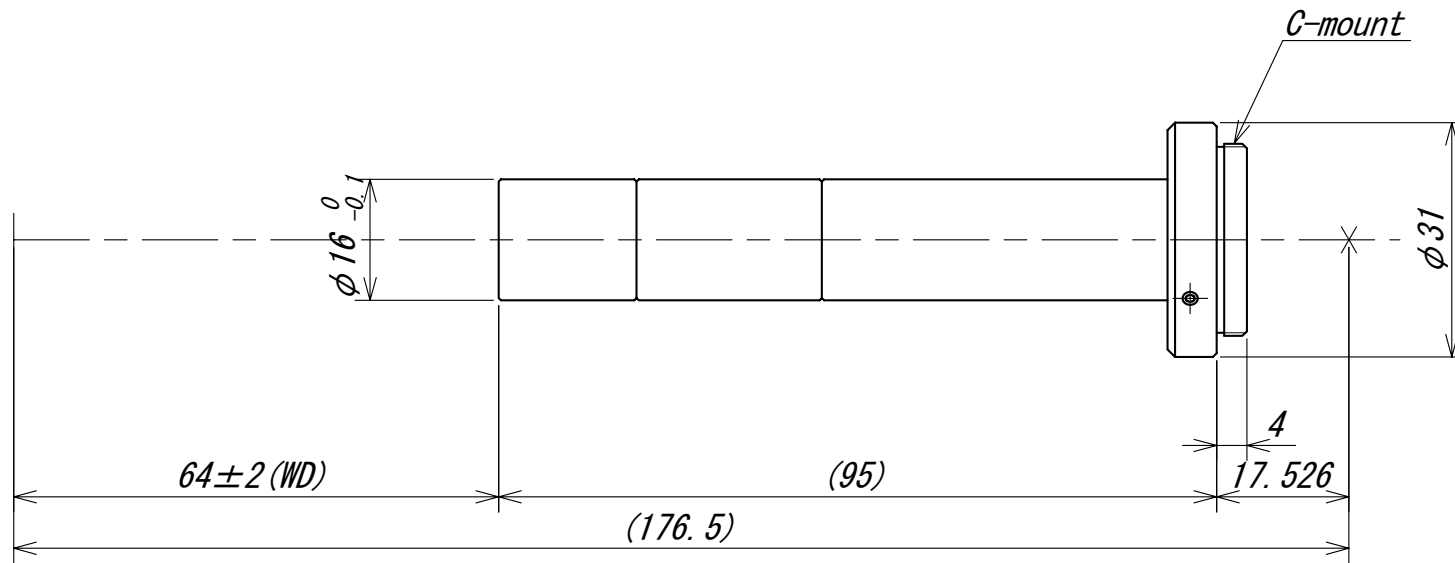

△				APPROVED	CHECKED	MATERIAL 材料	FINISH/ROUGHNESS 仕上程度	HEAT TREATMENT 熱処理	SURFACE TREATMENT 表面処理	QUANTITY 個数
△						OVER 250 UP TO 1000 ±0.3 ±0.5 ±1.0 ±0.2	UNIT (mm)	ANGLE 角度	METHOD 図法	MODEL 適要 (機種名)
△				DESIGNED	DRAWN	OVER 63 UP TO 250 ±0.2 ±0.3 ±0.6 ±0.15		SCALE	NAME	VS-TC8-65
△						OVER 16 UP TO 63 ±0.1 ±0.2 ±0.4 ±0.1	SCALE	1/1	NAME	外觀図
△						OVER 0 UP TO 16 ±0.05 ±0.1 ±0.2 ±0.1	DATE	'03.08.14	DRAW No.	ODTC0022A1
	DATE	EXCH No.	REVISION 変更記事			TOLERANCES	A	B	C	S