


Ultra-High Resolution Telecentric Lens

Model		VS-TCT1-65CO/S			
Optical Mag.		× 1.0 ± 5 %			
FOV (V x H)	2/3"	7.1	×	8.4	mm
	1/2"	4.8	×	6.4	mm
	1/3"	3.6	×	4.8	mm
WD		66.0 mm ± 2			
O/I (Object & Imager Distance)		190.5 mm			
Working F/# *Value at Iris Open		4.5			
NA		0.111			
DOF at PCoC ϕ 0.04mm		0.4 mm			
TV Distortion (2/3")		0.00 %			
Relative Illuminance (Y=5.5)		99 %			
Wavelength		Visible			
Mount		C-Mount			
Flange Back		17.526 mm			
Sensor Size (max.)		2/3"			
Co-Axial Prism		Built-in			
Filter Thread		M 34 P= 0.5			
Weight (approx.)		215 g			
Dimension		ϕ 36.5 (max.) × L = 107 mm			

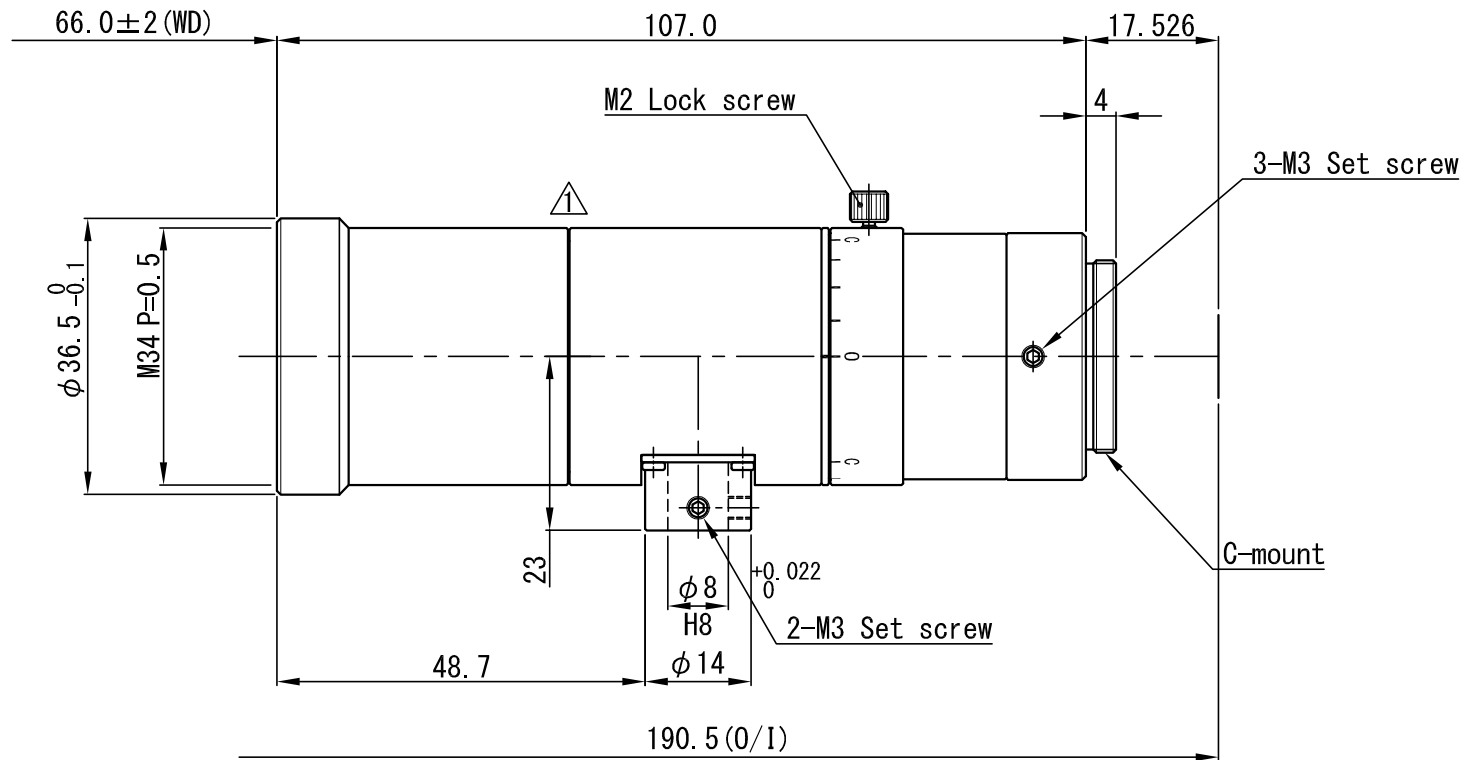

△×				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 個数				
△×				T. A.	T. A.	TREATMENT 処理	-	FINISHING 仕上	-	-				
△×						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-	-				
△×				DESIGNED	DRAWN	OVER 250 UP TO 1000	±0.3 ±0.5 ±1.0 ±0.2	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)				
△×				T. A.	T. T.	OVER 63 UP TO 250	±0.2 ±0.3 ±0.6 ±0.15	UNIT (mm)	-	VS-TCT1-65CO/S				
△× 1	形状変更	16.08.23	T. T.			OVER 16 UP TO 63	±0.1 ±0.2 ±0.4 ±0.1				SCALE	1 / 1	NAME	外觀図
NO.×箇所	REVISION 訂正事項	DATE	NAME			OVER 0 UP TO 16	±0.05 ±0.1 ±0.2 ±0.1				DATE	15.10.06	DRAW NO.	01DTC0554A1
						TOLERANCES	A B C S							