


Model	VSZ-M0324S		
Optical mag. range	0.3 ~ 2.4 x		
Optical mag.	0.3 x	1.2 x	2.4 x
Working F/# *Value at iris open	23.2	24.5	26.0
FOV (VxH mm)	1/2"	16.0 x 21.3	4.0 x 5.3
	1/3"	12.0 x 16.0	3.0 x 4.0
NA	0.006	0.024	0.046
DOF at PCoC ϕ 0.04mm	20.6 mm	1.4 mm	0.4 mm
Resolution *at λ 550nm	55.9 μ	14.0 μ	7.3 μ
TV distortion (max.)	-0.16%	0.04%	0.05%
Relative illuminance (2/3")	92.0%	100%	100%
WD	213 mm \pm 6		
Focus Range / Operation	\pm 20mm / Manual		
O/I (Object & Imager distance)	363.2 mm		
Wavelength	Visible (400nm - 700nm)		
Camera mount	C-mount		
Flange Back	17.526 mm		
Co-axial prism	-		
Sensor size (max.)	1/2"		
Weight (approx.)	g		
Dimension	Φ 32 (MAX) x L= 132.7 mm		

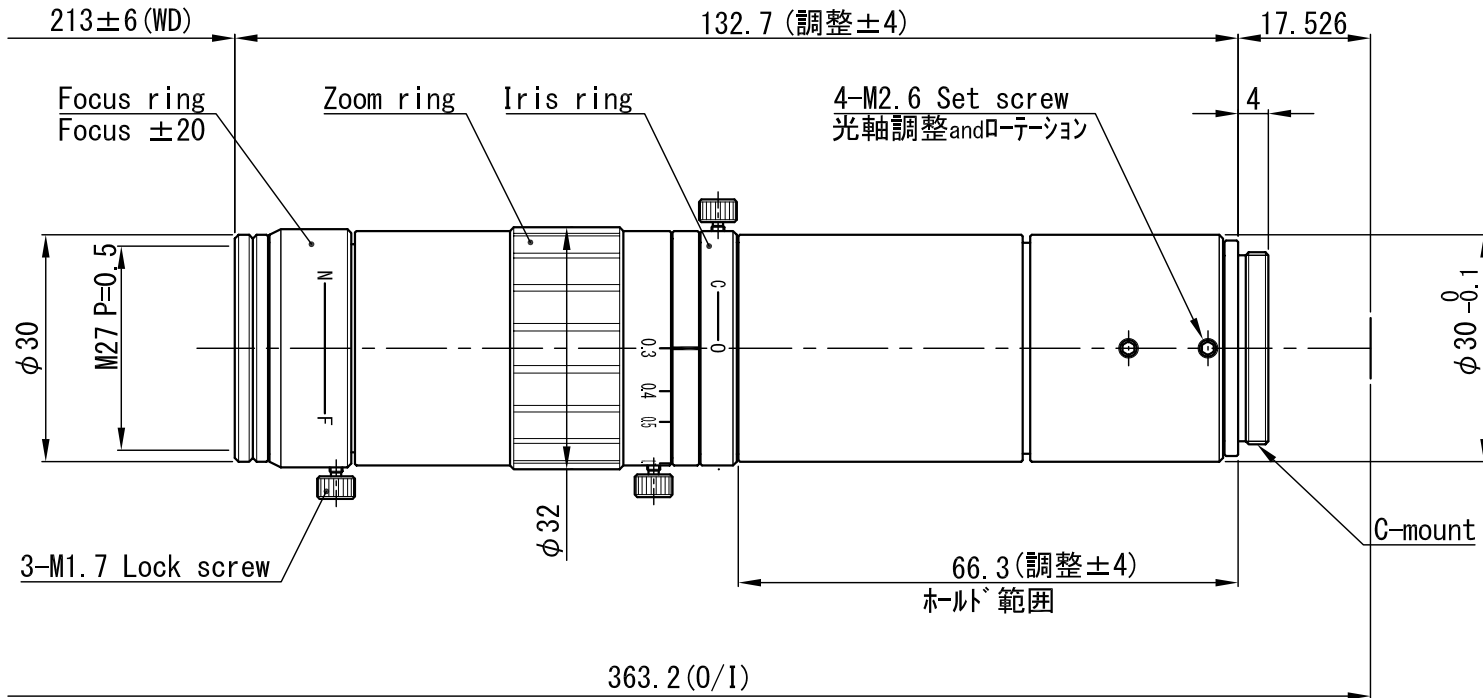

△				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 個数	
△				T. A.	T. A.	TREATMENT 処理	-	FINISHING 仕上	-	-	
△						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-		
△				DESIGNED	DRAWN	OVER 250 UP TO 1000	±0.3 ±0.5 ±1.0 ±0.2	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)	
△				T. A.	T. T.	OVER 63 UP TO 250	±0.2 ±0.3 ±0.6 ±0.15	UNIT (mm)	-	VSZ-M0324S	
△						OVER 16 UP TO 63	±0.1 ±0.2 ±0.4 ±0.1				SCALE
△						OVER 0 UP TO 16	±0.05 ±0.1 ±0.2 ±0.1	DATE	'11.04.26	DRAW NO.	01DMZ0074A11
	DATE	EXCH NO.	REVISION 変更記事			TOLERANCES	(A) B C S				