



HF818-12M

Focal length [mm]	8
Iris range (F. no)	F1.8-F22
Angle of view	56.9°×43.9° (2/3")
Working Distance (*) [mm]	∞ - 100
Operation of focus	Manual
Operation of iris	Manual
Filter thread [mm]	M30.5 x 0.5
Mount	C-mount
Weight (approx.) [g]	95
Sensor size (max.)	2/3"
TV distortion [%]	-1.03
Dimension [mm]	φ 33×48.5

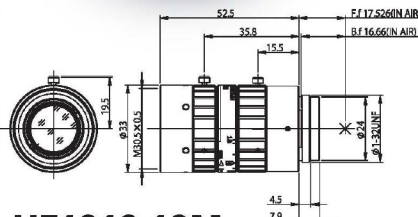


HF1218-12M

Focal length [mm]	12
Iris range (F. no)	F1.8-F22
Angle of view	39.3°×30.0° (2/3")
Working Distance (*) [mm]	∞ - 100
Operation of focus	Manual
Operation of iris	Manual
Filter thread [mm]	M30.5 x 0.5
Mount	C-mount
Weight (approx.) [g]	85
Sensor size (max.)	1/1.2"
TV distortion [%]	0.18
Dimension [mm]	φ 33×52.5

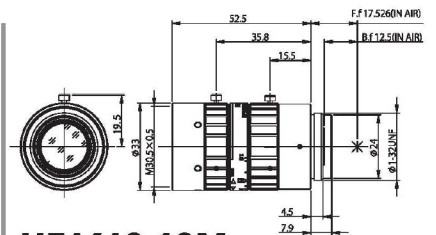


HF1618-12M

Focal length [mm]	16
Iris range (F. no)	F1.8-F22
Angle of view	30.8°×23.3° (2/3")
Working Distance (*) [mm]	∞ - 100
Operation of focus	Manual
Operation of iris	Manual
Filter thread [mm]	M30.5 x 0.5
Mount	C-mount
Weight (approx.) [g]	90
Sensor size (max.)	1/1.2"
TV distortion [%]	-0.03
Dimension [mm]	φ 33×52.5

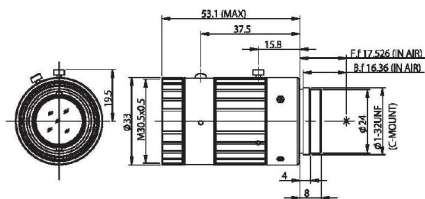

HF2518-12M

Focal length [mm]	25
Iris range (F. no)	F1.8-F22
Angle of view	20.0°×15.1° (2/3")
Working Distance (*) [mm]	∞ - 100
Operation of focus	Manual
Operation of iris	Manual
Filter thread [mm]	M30.5 x 0.5
Mount	C-mount
Weight (approx.) [g]	85
Sensor size (max.)	1/1.2"
TV distortion [%]	0.02
Dimension [mm]	φ 33×53.1

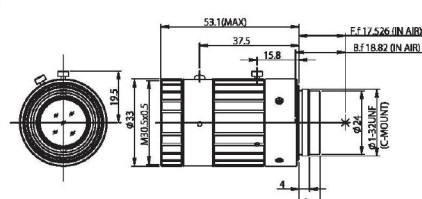

HF3520-12M

Focal length [mm]	35
Iris range (F. no)	F2.0-F22
Angle of view	14.7°×11.0° (2/3")
Working Distance (*) [mm]	∞ - 200
Operation of focus	Manual
Operation of iris	Manual
Filter thread [mm]	M30.5 x 0.5
Mount	C-mount
Weight (approx.) [g]	85
Sensor size (max.)	1"
TV distortion [%]	0.01
Dimension [mm]	φ 33×53.1

* From front of lens barrel