


Megapixel Telecentric Lens

Model	Front Lens	VS-TLS300		
	Rear Lens	VS-TLS300-003B		
Optical Mag.		× 0.029		
FOV (V x H)	2/3"	-		
	1/2"	165.5	×	220.7 mm
	1/3"	124.1	×	165.5 mm
WD		500.0 mm		
O/I (Object & Imager Distance)		1200.0 mm		
Working F/#		8.0		
NA		0.002		
TV Distortion (1/2")		0.01 %		
Relative Illuminance (Y=4)		100 %		
Wavelength		Visible		
Mount		C-Mount		
Flange Back		17.526 mm		
Sensor Size (max.)		1/2"		
Co-Axial Prism		-		
Weight (approx.)		15000 g		
Dimension		ϕ 300	(max.) ×	L = 682.5 mm

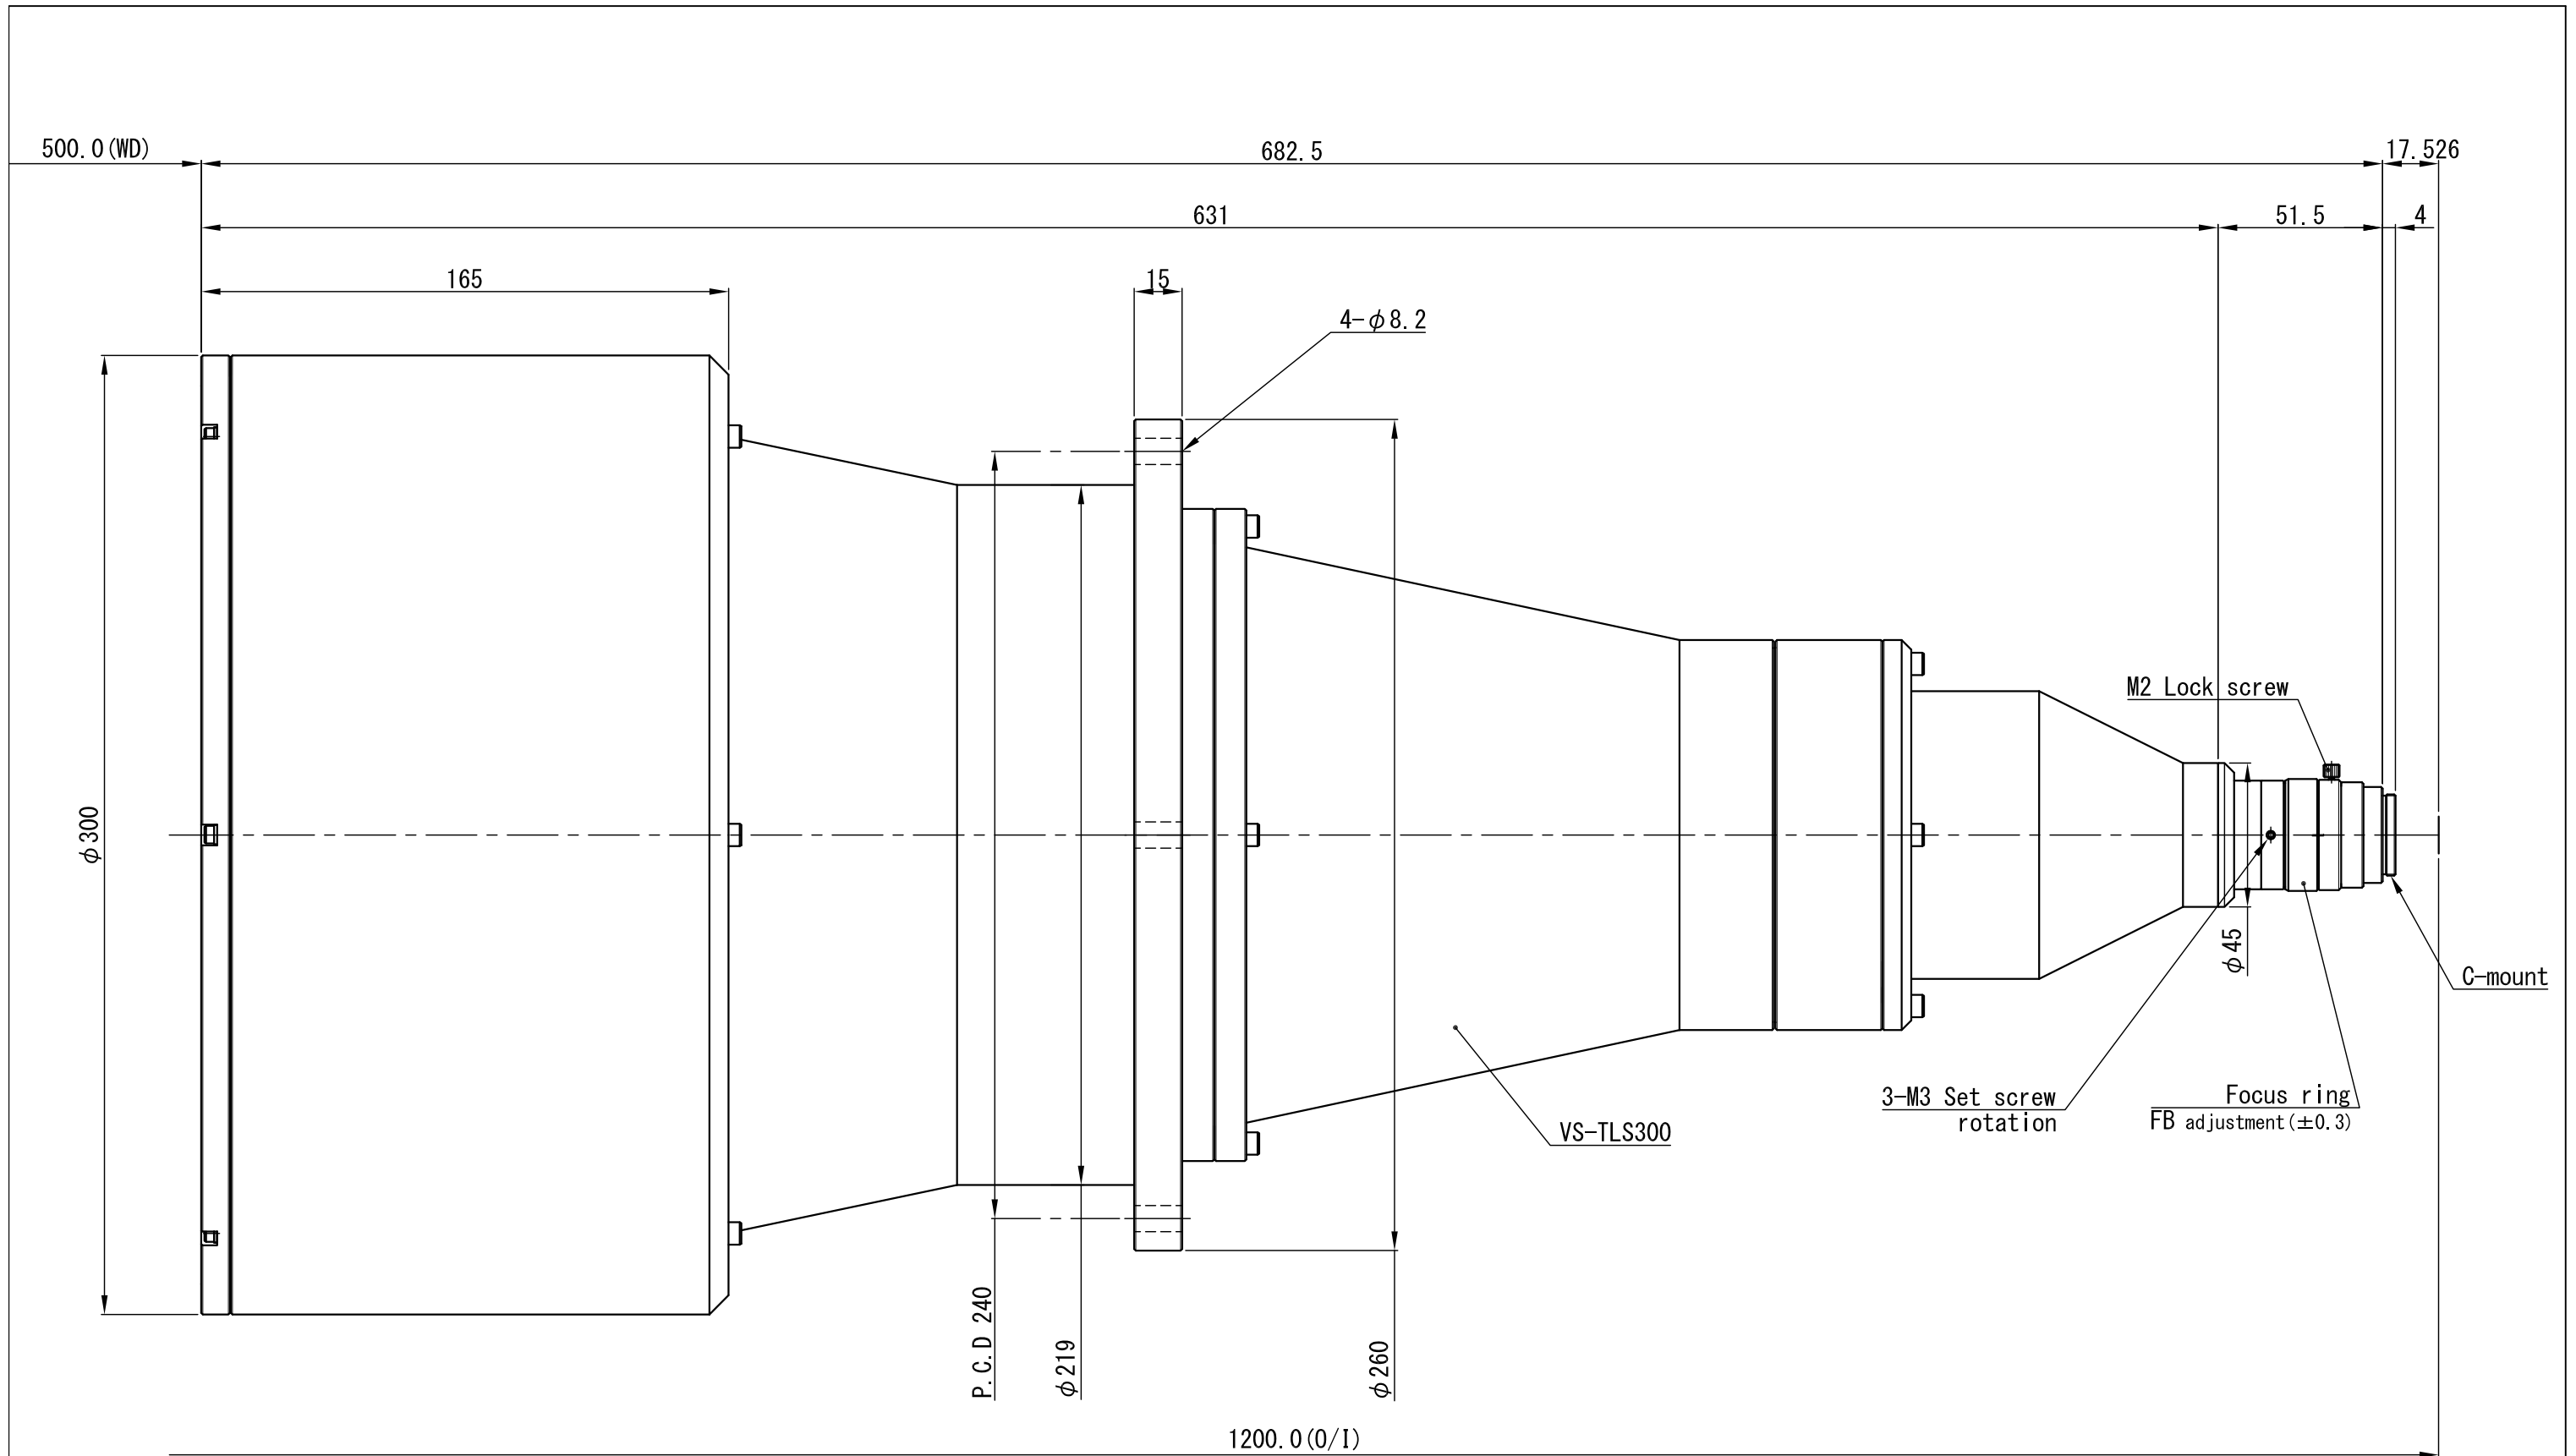

△×				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 個数				
△×				S. U.	S. U.	TREATMENT 処理	-	FINISHING 仕上	-					
△×						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-					
△×				DESIGNED	DRAWN	OVER 250 UP TO 1000	±0.3 ±0.5 ±1.0 ±0.2	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)				
△×				T. T.	T. T.	OVER 63 UP TO 250	±0.2 ±0.3 ±0.6 ±0.15	UNIT (mm)		VS-TLS300 + VS-TLS300-003B				
△×						OVER 16 UP TO 63	±0.1 ±0.2 ±0.4 ±0.1				SCALE	1 / 2	NAME	組合図
△×						OVER 0 UP TO 16	±0.05 ±0.1 ±0.2 ±0.1				DATE	'20.05.19	DRAW NO.	
NO. × 箇所	REVISION 訂正事項	DATE	NAME			TOLERANCES	A B C S							